


MARKET Printed Circuit (PC) Board Industry

PRODUCT(S) Series GL075PP4 Level Indicators

REQUIREMENT To monitor liquid level in waste storage tanks.

PROCESS FLUID(S) Caustics, Acids and Water used in plating.

INLET PRESSURE/TEMPERATURE Gravity Flow / Ambient

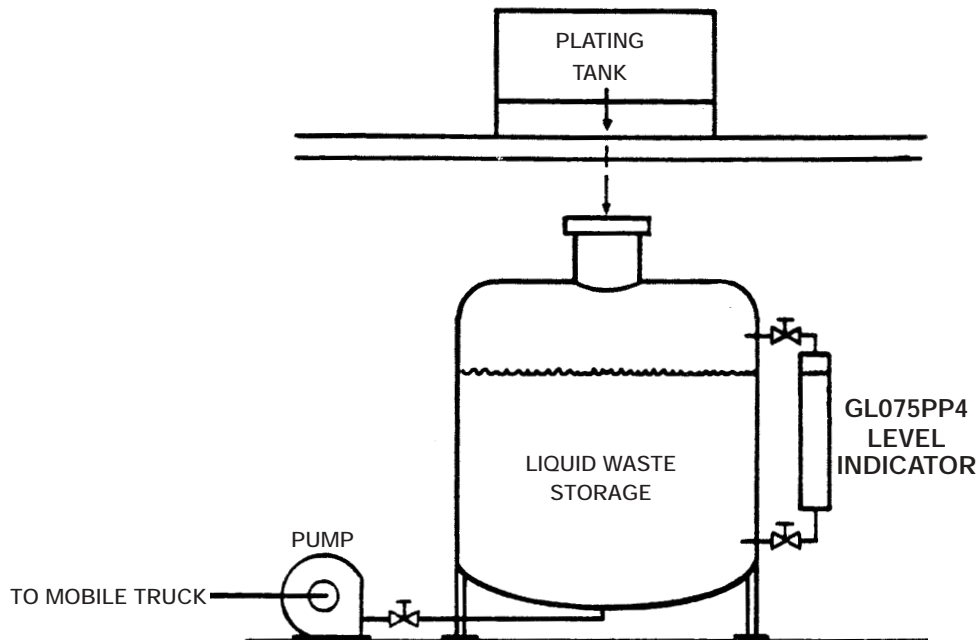

A circuit board manufacturer has a waste storage area in the company's basement. The area contains twelve (12) 6,000 gallon tanks for liquid waste storage of caustics, acid, water and various other chemicals used in etching PC boards. Waste liquids are gravity feed from the plating tanks on the first floor into the storage tanks in the

basement. Plast-O-Matic's GL075PP4 Level Indicators were selected for each tank to provide both chemical resistance and visual observation of level content. When the tanks are full the wastes are pumped into mobile chemical tank trucks and hauled away.