

8 7 6 5 4 3 2 1

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
A		THIRD DESIGN CONCEPT	02/04/19	CH




VLAVE FULLY OPEN

VALVE FULLY CLOSED

BOLTS WILL BE RECESSED

A THROUGH HOLE WITH A PIN WILL BE USED TO LOCK THE VALVE IN PLACE WHEN FULLY OPEN.

TWO SUPPORT CYLINDERS AND THE LOCKOUT PLATE WILL BE ONE PIECE.

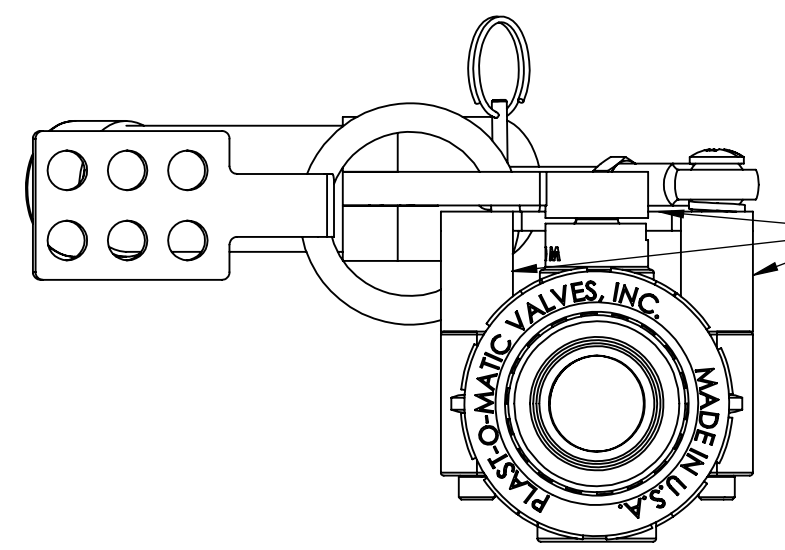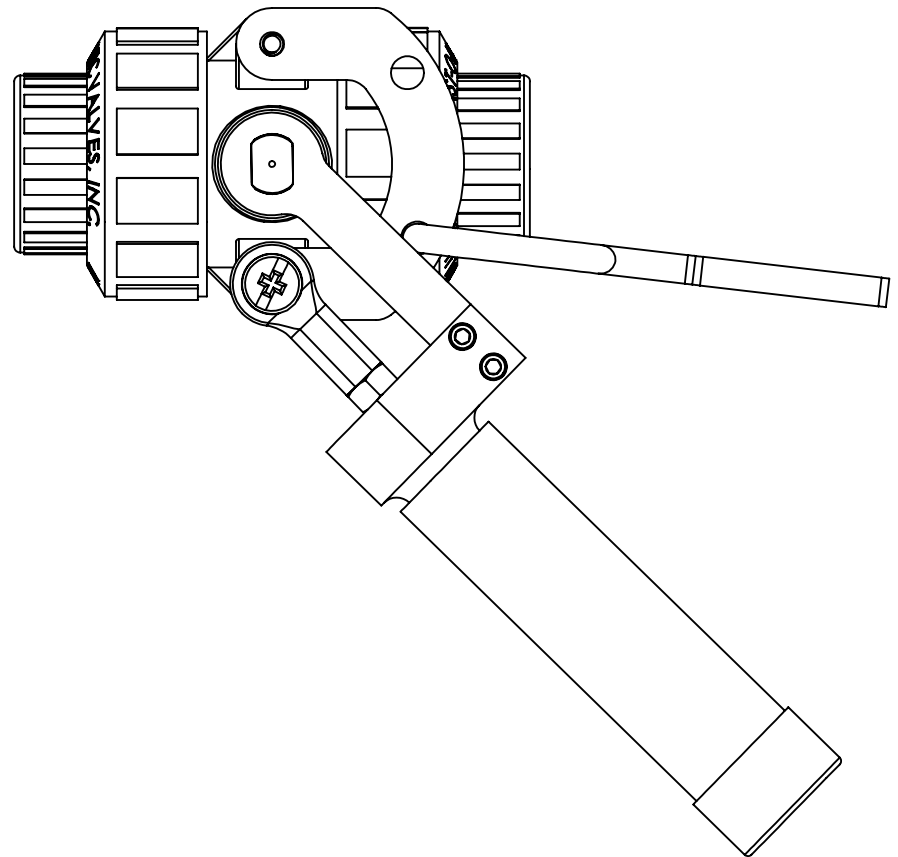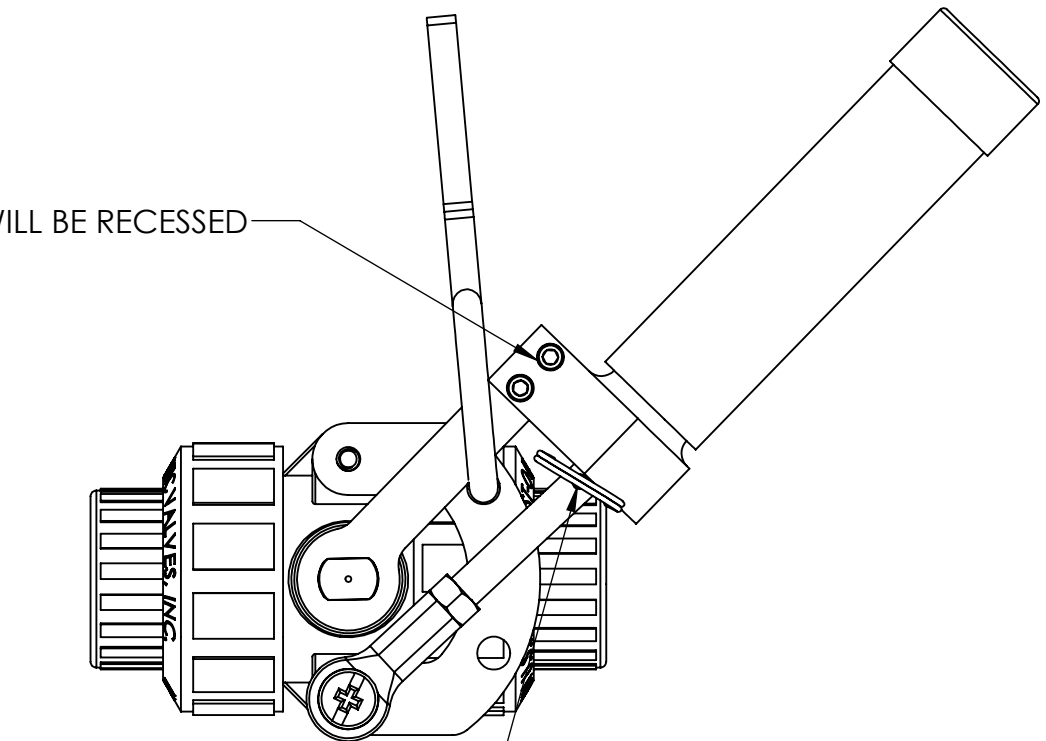

INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	DRAWN BY:	NAME	DATE	
	CHECKED BY:	CH	02/04/19	
UNLESS OTHERWISE SPECIFIED:	MATERIAL:		TITLE:	
DIMENSIONS ARE IN INCHES: .X ± 0.10 .XX ± 0.010 .XXX ± 0.005 ANGLES: ±2° CONCENTRICITY WITHIN .015 TIR	VARIOUS		DEADMAN HANDLE WITH LOCKOUT DESIGN CHANGE	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PLAST-O-MATIC VALVES (POM). ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PLAST-O-MATIC IS PROHIBITED.	FINISH:		SIZE DWG. NO. REV	
	NA		DEADMAN HANDLE WITH LOCKOUT	
BREAK ALL EDGES .010 - .020 SURFACE FINISH 125 MAX INSIDE CORNERS .010-.020 RAD SKIM CUT NOMINAL OUTSIDE DIAMETER	SCALE: 1:2	SHEET 1 OF 1		

8 7 6 5 4 3 2 1