

NPT TO BSP ADAPTERS

Convert female NPT connections to female BSPT

DESCRIPTION & FEATURES


Fittings are MNPT x FBSPT. Simply thread into any FNPT valve or fitting connection and it will accept MBSPT threaded pipe or fittings.

- Eliminates leaks, cross-threading, and other installation problems
- Available in PVC, CPVC, Natural Polypro, Kynar PVDF
- Designed to meet ASTM D2467, F1970, D4101, D3222
- Precision machined in the USA

Adapters are required to create BSPT connections for all Plast-O-Matic products except Ball Valves and ARV, CKS & VBS 1½" - 4".

They are also available separately to provide a convenient and reliable method for connecting any FNPT product to BSPT installation.

Not recommended for metal products or non-tapered BSP connections.

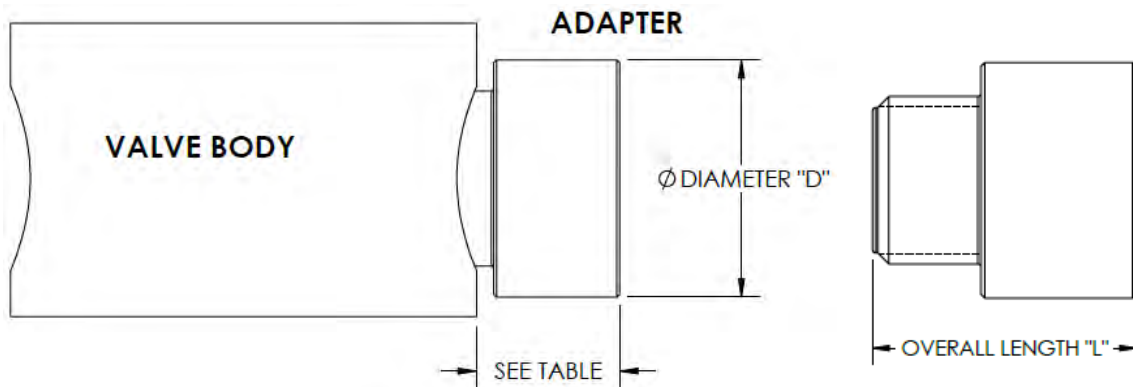

ADAPTER SIZE	PART NUMBER*	SIZE TO ADD PER CONNECTION ±1/4"	DIAMETER "D"	OVERALL LENGTH "L"
1/4"	BSP025	3/4"	0.9	1.1
1/2"	BSP050	1-3/16"	1.3	1.75
3/4"	BSP075	1-1/4"	1.5	1.8
1"	BSP100	1-3/8"	1.85	2.1
1-1/4"	BSP125	1-7/16"	2.25	2.2
1-1/2"	BSP150	1-1/2"	2.6	2.25
2"	BSP200	1-3/4"	3.1	2.5

* To complete the part number, add -PV for PVC, -CP for CPVC, -PP for natural polypro, -PF for PVDF. Example: BSP025-PV.

